




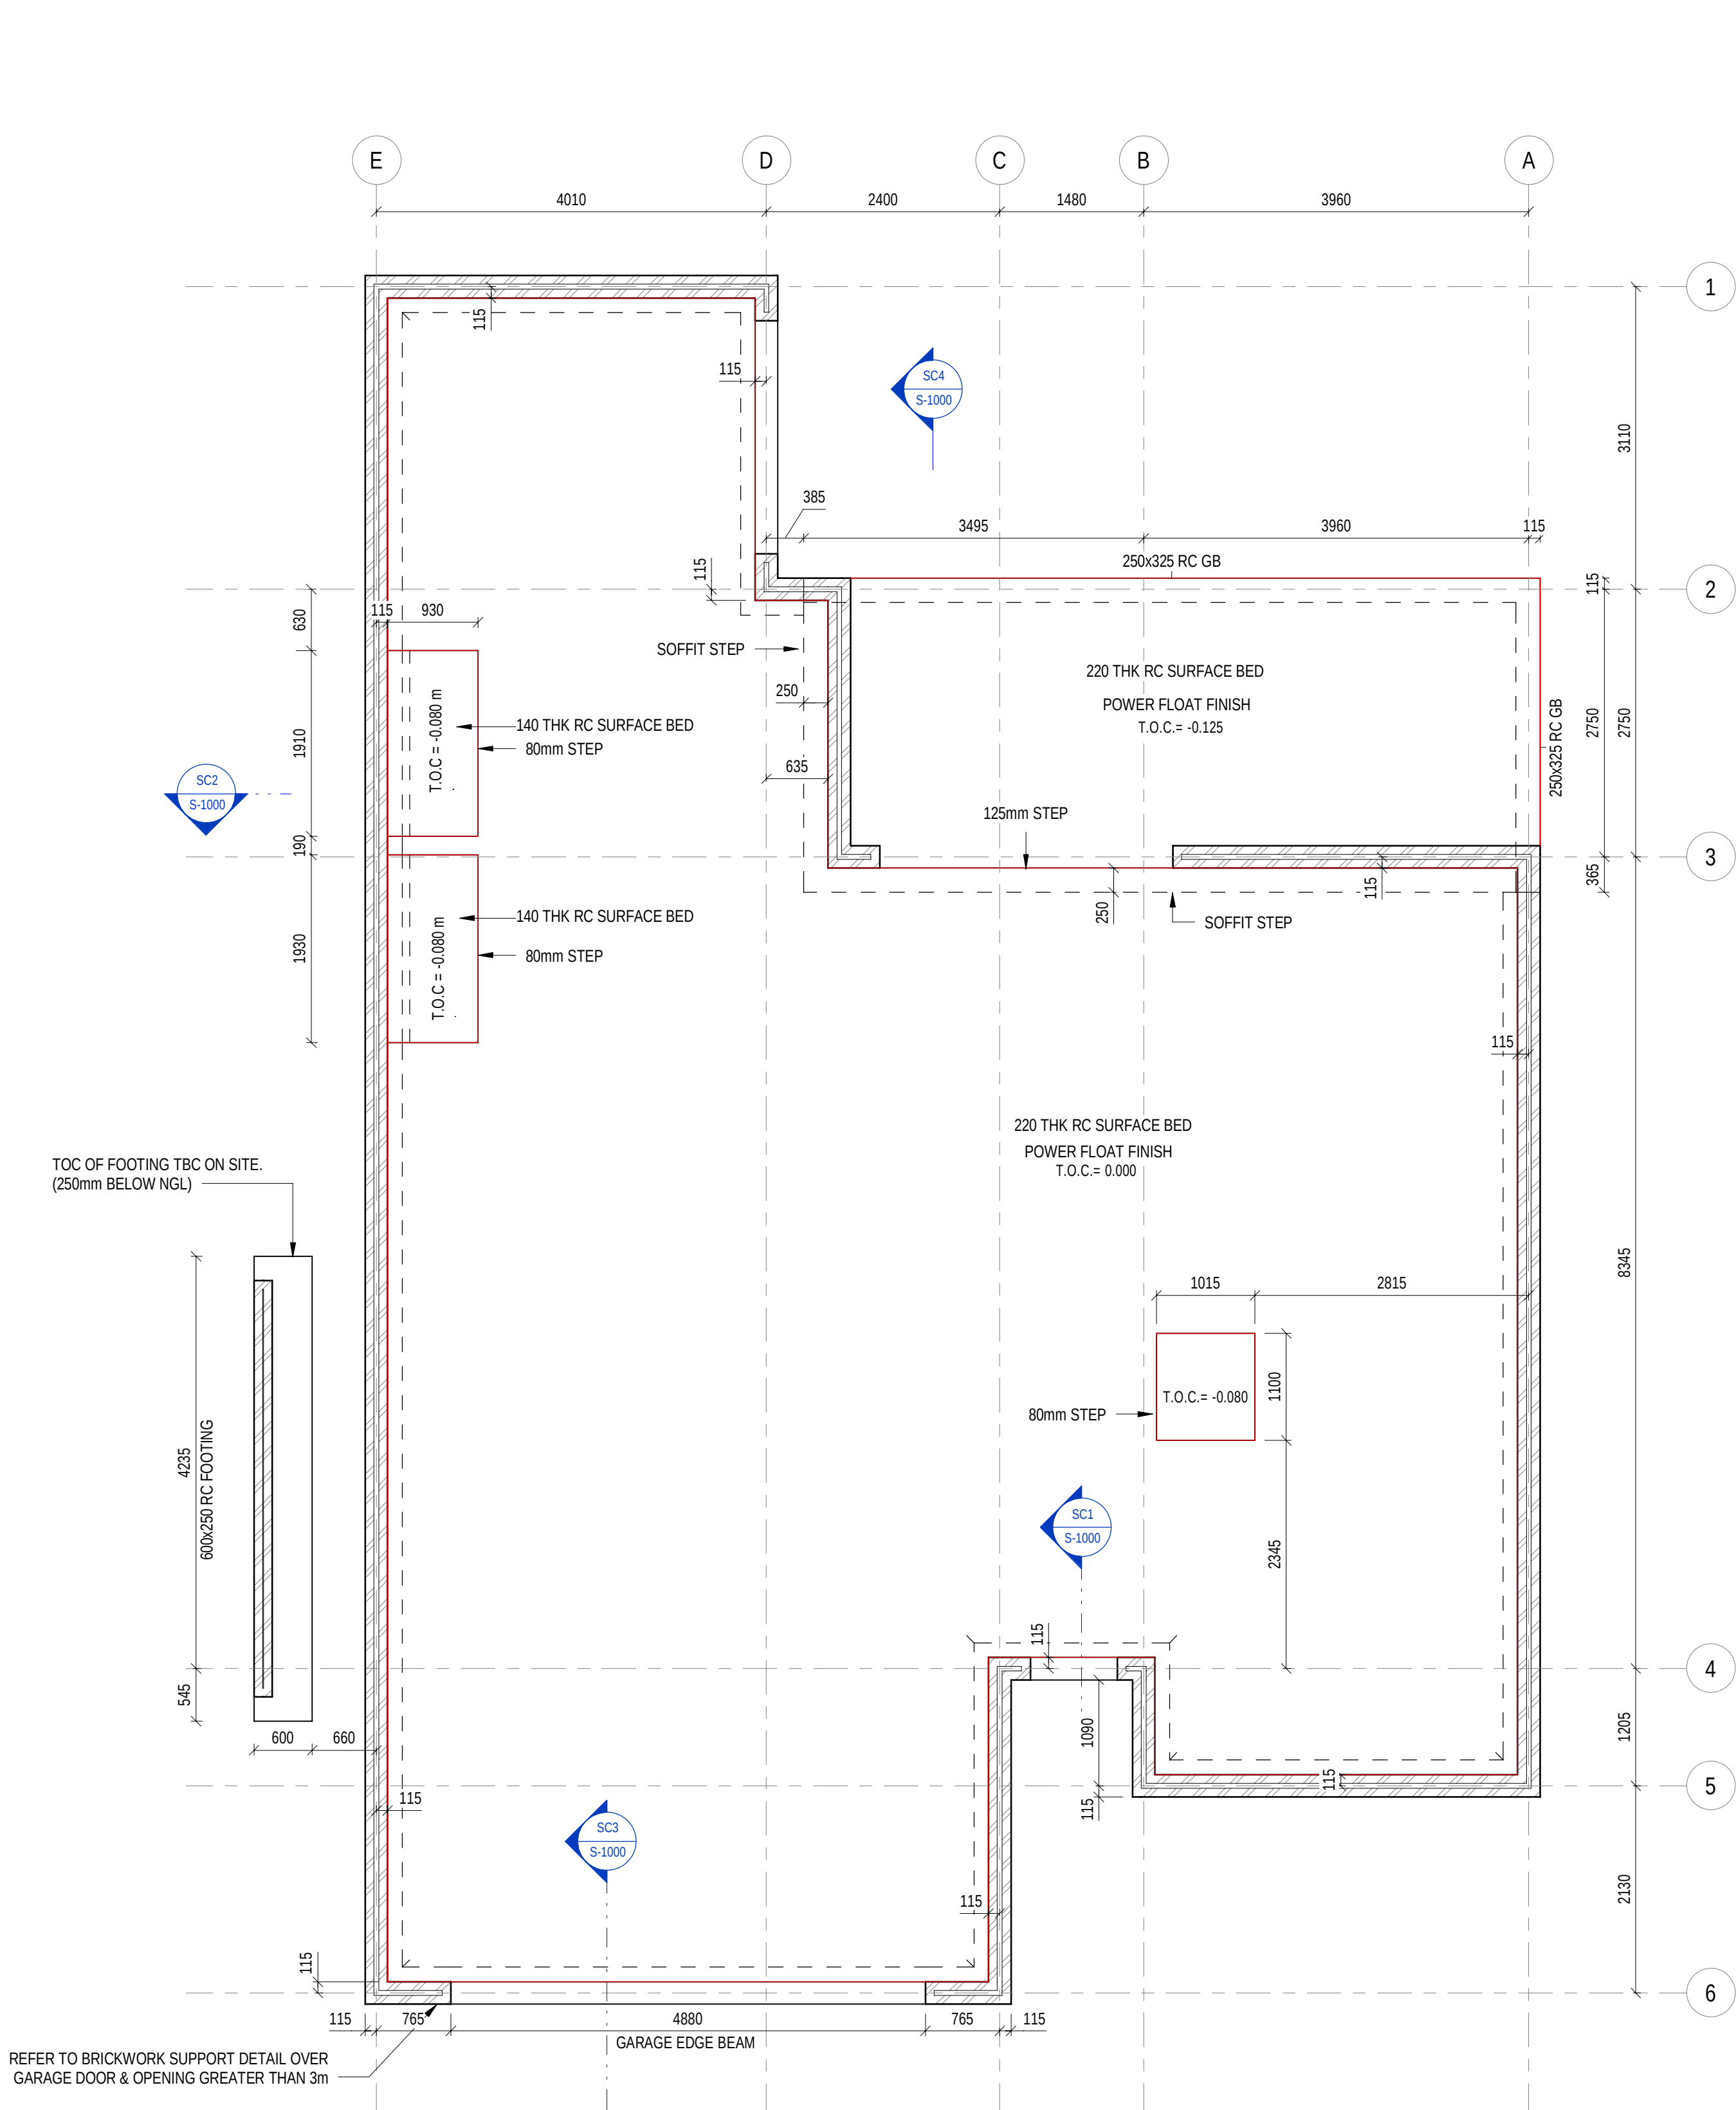


GROUND FLOOR LAYOUT
1:50

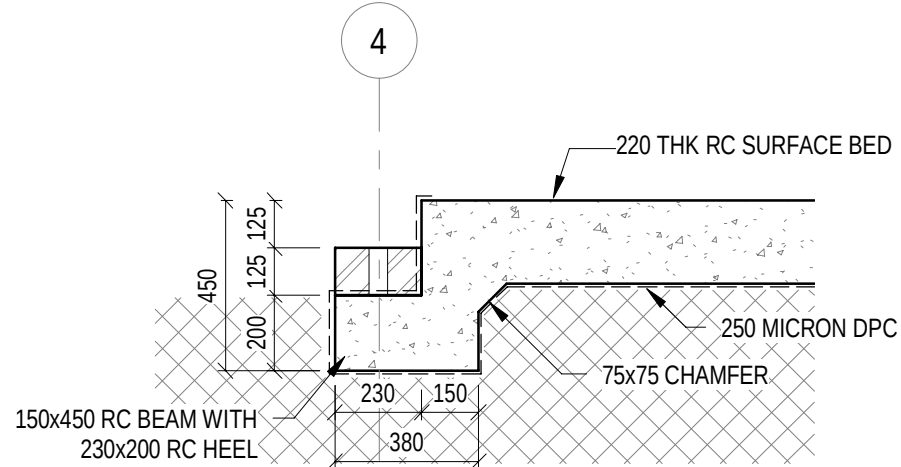


SECTION SC1 - TYPICAL DOOR THRESHOLD
1:20

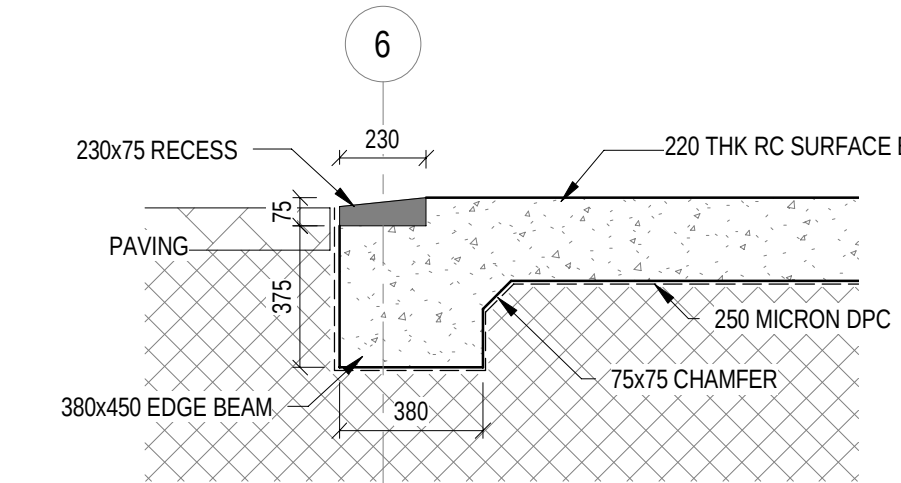


SECTION SC3 - TYPICAL GARAGE THRESHOLD
1:20

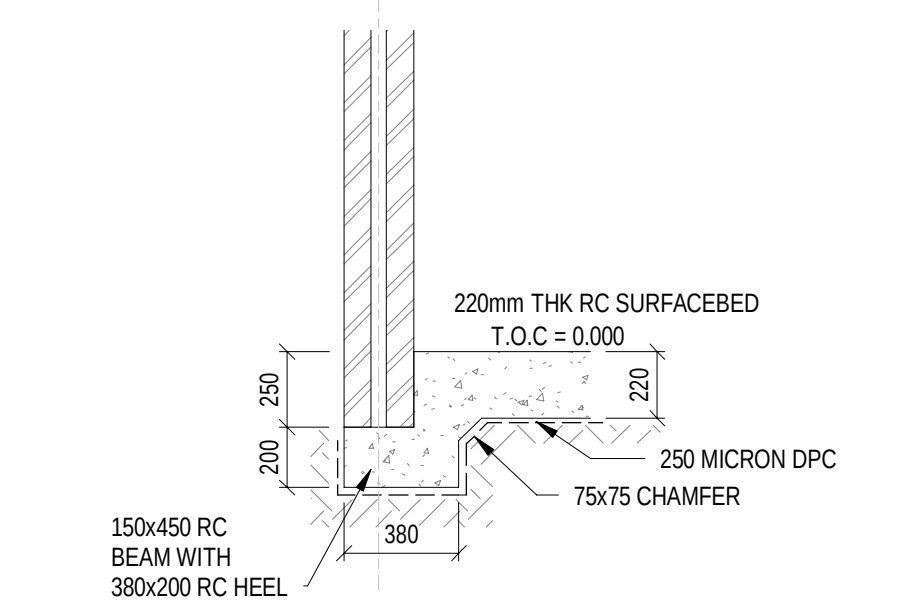


DETAIL 1 - TYPICAL EDGE GROUND BEAM DETAIL
1:25

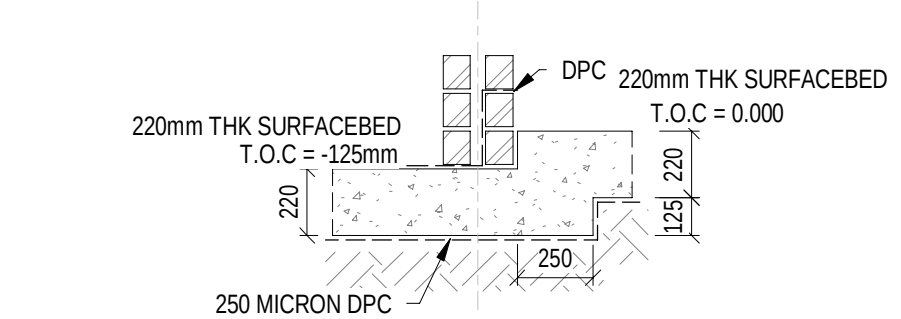


DETAIL 2 - TYPICAL PATIO THRESHOLD DETAIL
1:25

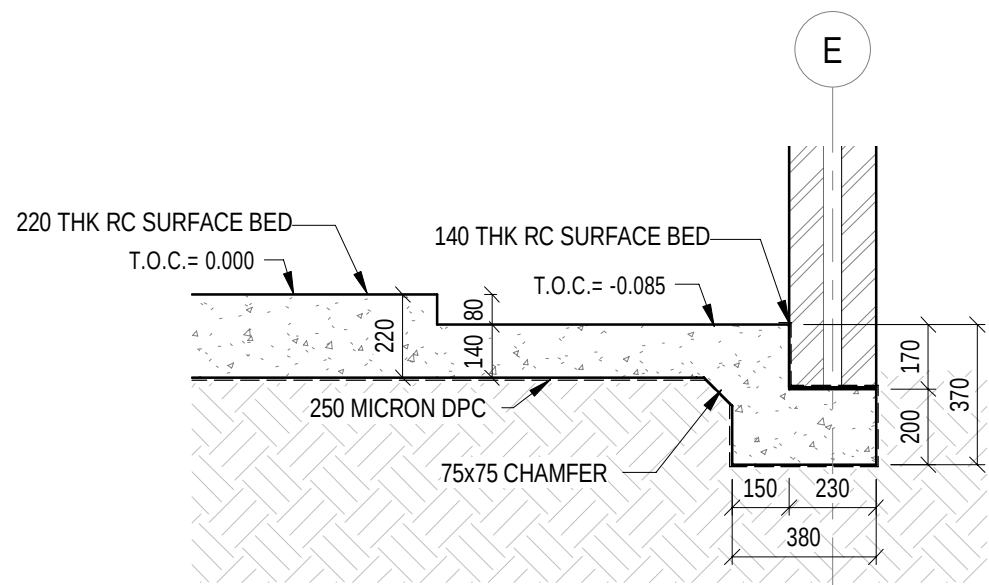

SECTION SC2 - TYPICAL SHOWER RECESS DETAIL
1:20

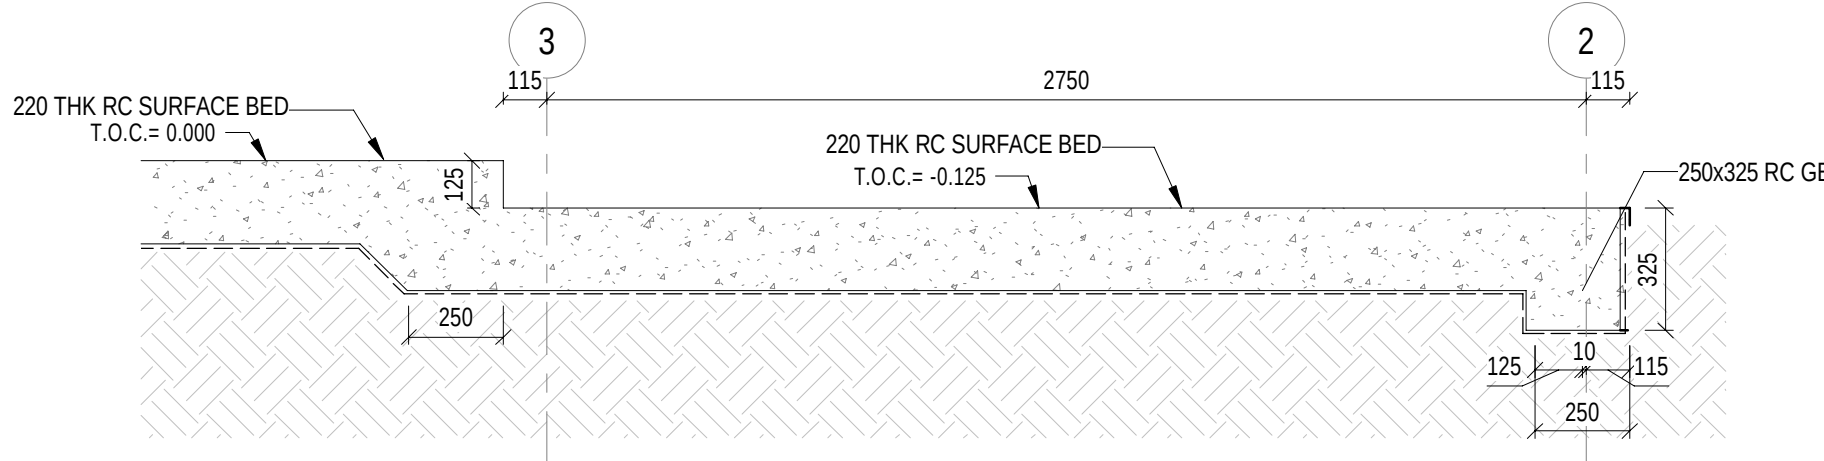

SECTION SC4 - PATIO STEP & EDGE
1:20

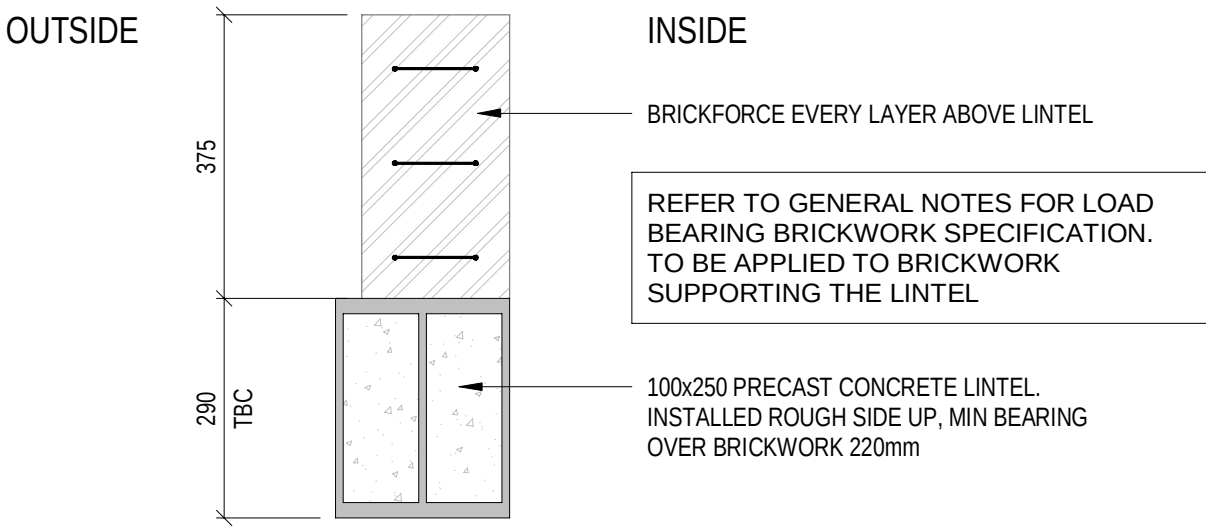

TYPICAL BRICKWORK SUPPORT DETAIL FOR OPENINGS
GREATER THAN 3m
1:10

GENERAL NOTES:

REFER TO PROJECT NOTES & SPECIFICATION DOCUMENT NO 2019-0173-QN-0001 FOR GENERAL NOTES.

ENGINEERS NOTES:

- THE CONTRACTOR IS RESPONSIBLE FOR CORRECT SETTING OUT OF BUILDINGS ON SITE WITH PARTICULAR REFERENCE TO THE BOUNDARIES AND BUILDING LINES.
- THE CONTRACTOR IS TO VERIFY ALL LEVELS AND DIMENSIONS ON SITE. DO NOT SCALE. USE FIGURED DIMENSIONS ONLY.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ANY RELEVANT ARCHITECTURAL, CIVIL, STRUCTURAL OR OTHER DRAWINGS.
- ANY ERRORS OR DISCREPANCIES ARE TO BE REPORTED IMMEDIATELY BEFORE WORK IS UNDERTAKEN.
- CONSTRUCTION TO BE DONE IN ACCORDANCE WITH ENGINEERS DETAILS AND/OR RELEVANT SANS 1200 SPECIFICATION.
- THE CONTRACTOR IS RESPONSIBLE FOR THE SUPPLY AND PLACING OF IN-SITU CONCRETE.
- THE CONTRACTOR IS RESPONSIBLE FOR THE SUPPLY AND ERECTION OF TEMPORARY SUPPORTS, FORMWORK TO BEAMS, COLUMNS, STAIRS, CANTILEVERS AND RAMPS.
- THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING REINFORCEMENT IN THE CORRECT POSITION AFTER FIXING AND DURING CONCRETING.
- NO HOLES OR CHASES ARE TO BE CUT IN ANY CONCRETE SECTION WITHOUT PRIOR APPROVAL OF THE ENGINEER.
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER 48 HOURS PRIOR TO CONCRETING. NO CONCRETE MAY BE POURED TO SLAB WITHOUT THE ENGINEER'S APPROVAL.

FOUNDATION NOTES:

- ALL FOUNDATIONS HAS BEEN SIZED FOR SOIL BEARING CAPACITY OF RAMP. DCP TESTS TO BE DONE ON SITE WHEN FOUNDATION TRENCHES HAVE BEEN OPENED TO CONFIRM BEARING.
- DURING CONSTRUCTION ALL EXCAVATIONS SHALL BE KEPT FREE OF WATER.
- NO FOOTINGS MAY BE FOUNDED ON RUBBLE, BACK FILLED MATERIAL OR SOILS CONTAINING HIGH ORGANIC CONTENT.
- A 75mm BULKING LAYER IS REQUIRED FOR CLAYEY MATERIAL.
- THE BOTTOM OF ALL FOUNDATIONS ARE TO BE LEVEL.

BRICKWORK NOTES:

- BRICKWORK TO BE SET OUT ACCORDING TO ARCHITECT'S DRAWINGS.
- BRICK STRENGTH TO BE 14MPa.
- BRICKWORK TO BE INSTALLED EVERY 3RD COURSE.
- BUTTERFLY TIES @ 200mm c/c - HORIZONTALLY AND AT BRICKFORCE CENTRES VERTICALLY.

CONCRETE NOTES:

- ALL CONCRETE WORK SHALL COMPLY WITH THE REQUIREMENTS OF SANS 1200 G.
- STRIPPING TIMES OF FORMWORK AND PROPPING SHALL BE IN ACCORDANCE WITH SANS 1200 G.
- 25mm x 25mm CHAMFER TO ALL EXPOSED CORNERS.
- CONCRETE FINISHES AS PER ARCHITECT'S SPEC.
- CONCRETE SPECIFICATION:

GROUND BEAM SIZES AS SHOWN:
CLASS 25MPa/19mm.

SURFACE BED:
CLASS 25MPa/19mm
MAXIMUM 15% FLY ASH AND 180mm WATER

RETAINING WALLS
CLASS 25MPa/19mm

COLUMNS
CLASS 25MPa/19mm

SUSPENDED SLAB
CLASS 25MPa/19mm

- COVER TO REINFORCEMENT:
a. FOUNDATIONS = 50mm
b. SURFACE BEDS = 30mm
c. COLUMNS = 50mm

ISSUE / REVISION

VR	DATE	DESCRIPTION	JW	ISS BY
1	2025-06-02	ISSUED FOR CONSTRUCTION	JW	

DRAWING STATUS

FOR CONSTRUCTION



ARCHITECT



CLIENT



PROJECT

SALTA - CAPRI PHASE 2

DRAWING CHECKS

DESIGNED BY: JW
DRAWN BY: JW
CHECKED BY: JM
APPROVED BY: JM

DRAWING TITLE

MIRRORED B3.3(2) - GROUND FLOOR
LAYOUT & DETAILS

SCALE	As indicated
2019_0173-13-B3.3(2)M-S-1000	1